

6.231 DYNAMIC PROGRAMMING

LECTURE 11

LECTURE OUTLINE

- Review of DP for imperfect state info
- Linear quadratic problems
- Separation of estimation and control

REVIEW: PROBLEM WITH IMPERFECT STATE INFO

- Instead of knowing x_k , we receive observations

$$z_0 = h_0(x_0, v_0), \quad z_k = h_k(x_k, u_{k-1}, v_k), \quad k \geq 1$$

- I_k : information vector available at time k :

$$I_0 = z_0, \quad I_k = (z_0, z_1, \dots, z_k, u_0, u_1, \dots, u_{k-1}), \quad k \geq 1$$

- Optimization over policies $\pi = \{\mu_0, \mu_1, \dots, \mu_{N-1}\}$, where $\mu_k(I_k) \in U_k$, for all I_k and k .

- Find a policy π that minimizes

$$J_\pi = \underset{\substack{x_0, w_k, v_k \\ k=0, \dots, N-1}}{E} \left\{ g_N(x_N) + \sum_{k=0}^{N-1} g_k(x_k, \mu_k(I_k), w_k) \right\}$$

subject to the equations

$$x_{k+1} = f_k(x_k, \mu_k(I_k), w_k), \quad k \geq 0,$$

$$z_0 = h_0(x_0, v_0), \quad z_k = h_k(x_k, \mu_{k-1}(I_{k-1}), v_k), \quad k \geq 1$$

DP ALGORITHM

- Reformulate to perfect state info problem, and write the DP algorithm:

$$J_k(I_k) = \min_{u_k \in U_k} \left[\begin{array}{l} E_{x_k, w_k, z_{k+1}} \{ g_k(x_k, u_k, w_k) \\ + J_{k+1}(I_k, z_{k+1}, u_k) \mid I_k, u_k \} \end{array} \right]$$

for $k = 0, 1, \dots, N - 2$, and for $k = N - 1$,

$$J_{N-1}(I_{N-1}) = \min_{u_{N-1} \in U_{N-1}} \left[\begin{array}{l} E_{x_{N-1}, w_{N-1}} \{ g_N(f_{N-1}(x_{N-1}, u_{N-1}, w_{N-1})) \\ + g_{N-1}(x_{N-1}, u_{N-1}, w_{N-1}) \mid I_{N-1}, u_{N-1} \} \end{array} \right],$$

- The optimal cost J^* is given by

$$J^* = E_{z_0} \{ J_0(z_0) \}.$$

LINEAR-QUADRATIC PROBLEMS

- System: $x_{k+1} = A_k x_k + B_k u_k + w_k$
- Quadratic cost

$$E_{w_k, k=0,1,\dots,N-1} \left\{ x'_N Q_N x_N + \sum_{k=0}^{N-1} (x'_k Q_k x_k + u'_k R_k u_k) \right\}$$

where $Q_k \geq 0$ and $R_k > 0$.

- Observations

$$z_k = C_k x_k + v_k, \quad k = 0, 1, \dots, N - 1.$$

- $w_0, \dots, w_{N-1}, v_0, \dots, v_{N-1}$ indep. zero mean
- Key fact to show:
 - Optimal policy $\{\mu_0^*, \dots, \mu_{N-1}^*\}$ is of the form:

$$\mu_k^*(I_k) = L_k E\{x_k \mid I_k\}$$

- L_k : same as for the perfect state info case
- Estimation problem and control problem can be solved separately

DP ALGORITHM I

- Last stage $N - 1$ (suppressing index $N - 1$):

$$J_{N-1}(I_{N-1}) = \min_{u_{N-1}} \left[E_{x_{N-1}, w_{N-1}} \left\{ x'_{N-1} Q x_{N-1} \right. \right. \\ \left. \left. + u'_{N-1} R u_{N-1} + (A x_{N-1} + B u_{N-1} + w_{N-1})' \right. \right. \\ \left. \left. \cdot Q (A x_{N-1} + B u_{N-1} + w_{N-1}) \mid I_{N-1}, u_{N-1} \right\} \right]$$

- Since $E\{w_{N-1} \mid I_{N-1}\} = E\{w_{N-1}\} = 0$, the minimization involves

$$\min_{u_{N-1}} \left[u'_{N-1} (B' Q B + R) u_{N-1} \right. \\ \left. + 2 E\{x_{N-1} \mid I_{N-1}\}' A' Q B u_{N-1} \right]$$

The minimization yields the optimal μ_{N-1}^* :

$$u_{N-1}^* = \mu_{N-1}^*(I_{N-1}) = L_{N-1} E\{x_{N-1} \mid I_{N-1}\}$$

where

$$L_{N-1} = -(B' Q B + R)^{-1} B' Q A$$

DP ALGORITHM II

- Substituting in the DP algorithm

$$\begin{aligned} J_{N-1}(I_{N-1}) = & \underset{x_{N-1}}{E} \{x'_{N-1} K_{N-1} x_{N-1} \mid I_{N-1}\} \\ & + \underset{x_{N-1}}{E} \left\{ \left(x_{N-1} - E\{x_{N-1} \mid I_{N-1}\} \right)' \right. \\ & \quad \cdot P_{N-1} \left(x_{N-1} - E\{x_{N-1} \mid I_{N-1}\} \right) \mid I_{N-1} \left. \right\} \\ & + \underset{w_{N-1}}{E} \{w'_{N-1} Q_N w_{N-1}\}, \end{aligned}$$

where the matrices K_{N-1} and P_{N-1} are given by

$$\begin{aligned} P_{N-1} = & A'_{N-1} Q_N B_{N-1} (R_{N-1} + B'_{N-1} Q_N B_{N-1})^{-1} \\ & \cdot B'_{N-1} Q_N A_{N-1}, \end{aligned}$$

$$K_{N-1} = A'_{N-1} Q_N A_{N-1} - P_{N-1} + Q_{N-1}.$$

- Note the structure of J_{N-1} : in addition to the quadratic and constant terms, it involves a quadratic in the estimation error

$$x_{N-1} - E\{x_{N-1} \mid I_{N-1}\}$$

DP ALGORITHM III

- DP equation for period $N - 2$:

$$\begin{aligned}
 J_{N-2}(I_{N-2}) &= \min_{u_{N-2}} \left[E_{x_{N-2}, w_{N-2}, z_{N-1}} \{x'_{N-2} Q x_{N-2} \right. \\
 &\quad \left. + u'_{N-2} R u_{N-2} + J_{N-1}(I_{N-1}) \mid I_{N-2}, u_{N-2} \right] \\
 &= E \{ x'_{N-2} Q x_{N-2} \mid I_{N-2} \} \\
 &\quad + \min_{u_{N-2}} \left[u'_{N-2} R u_{N-2} + x'_{N-1} K_{N-1} x_{N-1} \mid I_{N-2} \right] \\
 &\quad + E \left\{ \left(x_{N-1} - E \{ x_{N-1} \mid I_{N-1} \} \right)' \right. \\
 &\quad \left. \cdot P_{N-1} \left(x_{N-1} - E \{ x_{N-1} \mid I_{N-1} \} \right) \mid I_{N-2}, u_{N-2} \right\} \\
 &\quad + E_{w_{N-1}} \{ w'_{N-1} Q_N w_{N-1} \}.
 \end{aligned}$$

- Key point: We have excluded the next to last term from the minimization with respect to u_{N-2} .
- This term turns out to be independent of u_{N-2} .

QUALITY OF ESTIMATION LEMMA

- For every k , there is a function M_k such that we have

$$x_k - E\{x_k \mid I_k\} = M_k(x_0, w_0, \dots, w_{k-1}, v_0, \dots, v_k),$$

independently of the policy being used.

- The following simplified version of the lemma conveys the main idea.
- Simplified Lemma: Let r, u, z be random variables such that r and u are independent, and let $x = r + u$. Then

$$x - E\{x \mid z, u\} = r - E\{r \mid z\}.$$

- Proof: We have

$$\begin{aligned} x - E\{x \mid z, u\} &= r + u - E\{r + u \mid z, u\} \\ &= r + u - E\{r \mid z, u\} - u \\ &= r - E\{r \mid z, u\} \\ &= r - E\{r \mid z\}. \end{aligned}$$

APPLYING THE QUALITY OF ESTIMATION LEMMA

- Using the lemma,

$$x_{N-1} - E\{x_{N-1} \mid I_{N-1}\} = \xi_{N-1},$$

where

ξ_{N-1} : function of $x_0, w_0, \dots, w_{N-2}, v_0, \dots, v_{N-1}$

- Since ξ_{N-1} is independent of u_{N-2} , the conditional expectation of $\xi'_{N-1} P_{N-1} \xi_{N-1}$ satisfies

$$\begin{aligned} E\{\xi'_{N-1} P_{N-1} \xi_{N-1} \mid I_{N-2}, u_{N-2}\} \\ = E\{\xi'_{N-1} P_{N-1} \xi_{N-1} \mid I_{N-2}\} \end{aligned}$$

and is independent of u_{N-2} .

- So minimization in the DP algorithm yields

$$u_{N-2}^* = \mu_{N-2}^*(I_{N-2}) = L_{N-2} E\{x_{N-2} \mid I_{N-2}\}$$

FINAL RESULT

- Continuing similarly (using also the quality of estimation lemma)

$$\mu_k^*(I_k) = L_k E\{x_k \mid I_k\},$$


where L_k is the same as for perfect state info:

$$L_k = -(R_k + B_k' K_{k+1} B_k)^{-1} B_k' K_{k+1} A_k,$$

with K_k generated from $K_N = Q_N$, using

$$K_k = A_k' K_{k+1} A_k - P_k + Q_k,$$

$$P_k = A_k' K_{k+1} B_k (R_k + B_k' K_{k+1} B_k)^{-1} B_k' K_{k+1} A_k$$

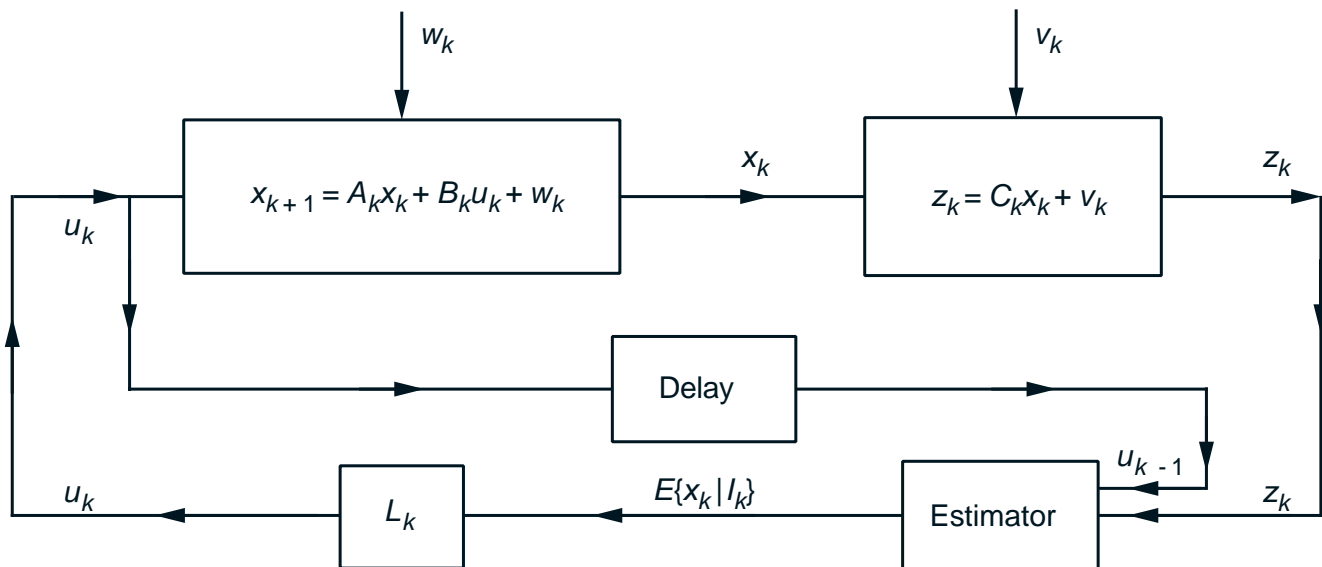

SEPARATION INTERPRETATION

- The optimal controller can be decomposed into
 - (a) An *estimator*, which uses the data to generate the conditional expectation $E\{x_k \mid I_k\}$.
 - (b) An *actuator*, which multiplies $E\{x_k \mid I_k\}$ by the gain matrix L_k and applies the control input $u_k = L_k E\{x_k \mid I_k\}$.
- Generically the estimate \hat{x} of a random vector x given some information (random vector) I , which minimizes the mean squared error

$$E_x \{ \|x - \hat{x}\|^2 \mid I \} = \|x\|^2 - 2E\{x \mid I\}\hat{x} + \|\hat{x}\|^2$$

is $E\{x \mid I\}$ (set to zero the derivative with respect to \hat{x} of the above quadratic form).

- The estimator portion of the optimal controller is optimal for the problem of estimating the state x_k assuming the control is not subject to choice.
- The actuator portion is optimal for the control problem assuming perfect state information.

STEADY STATE/IMPLEMENTATION ASPECTS

- As $N \rightarrow \infty$, the solution of the Riccati equation converges to a steady state and $L_k \rightarrow L$.
- If x_0 , w_k , and v_k are Gaussian, $E\{x_k | I_k\}$ is a *linear* function of I_k and is generated by a nice recursive algorithm, the Kalman filter.
- The Kalman filter involves also a Riccati equation, so for $N \rightarrow \infty$, and a stationary system, it also has a steady-state structure.
- Thus, for Gaussian uncertainty, the solution is nice and possesses a steady state.
- For nonGaussian uncertainty, computing $E\{x_k | I_k\}$ maybe very difficult, so a suboptimal solution is typically used.
- Most common suboptimal controller: Replace $E\{x_k | I_k\}$ by the estimate produced by the Kalman filter (act as if x_0 , w_k , and v_k are Gaussian).
- It can be shown that this controller is optimal within the class of controllers that are *linear* functions of I_k .