

PFC/RR-80-22

PLASMA DYNAMICS

Section B

B. Coppi, J. E. McCune, A. Bers, T. H.  
Dupree, G. Bekefi, L. D. Smullin, et.al.

January 1980

Massachusetts Institute of Technology  
Research Laboratory of Electronics

PLASMA DYNAMICS  
Section B

B. Coppi	pp. 105-107
J.E. McCune et al.	pp. 107-109
A. Bers et al.	pp. 110-112
T.H. Dupree et al.	pp. 113-114
G. Bekefi et al.	pp. 114-121
L.D. Smullin et al.	p. 121

Reprinted from Section XX of RLE Progress Report No. 122, January 1980, of the  
Research Laboratory of Electronics.

## XX. PLASMA DYNAMICS

### B. Plasma Research Related to Fusion

#### 1. PHYSICS OF THERMONUCLEAR PLASMAS

U.S. Department of Energy (Contracts DE-AC02-78ET51013  
and DE-AS02-78ET53073.A002)

Bruno Coppi

An understanding of the physics of high-temperature plasmas is of primary importance in the solution of the problem of controlled thermonuclear fusion. One of our goals is the magnetic confinement and heating of plasmas with densities in the interval  $10^{14}$  to  $10^{15}$  particles/cm<sup>3</sup> and thermal energies in the few kiloelectron-volt range. The macroscopic transport properties (e.g., particle diffusion and thermal conductivity) of plasmas in these regimes are weakly affected by two-body collisions between particles. The relevant transport coefficients, in fact, are influenced significantly by the type of collective modes that can be excited, such as density and temperature fluctuations caused by microinstabilities.

The primary focus of our activities has been on the experimental effort involving the Alcator A and C devices. Our purpose has been to realize plasmas that can sustain very high current densities without becoming macroscopically unstable, in order to achieve the highest possible rate of resistive heating of the plasma and relatively high density regimes.

Alcator's unique properties, high current and particle densities and relatively low impurity concentration, have made it one of the most successful confinements in terms of achieving the highest known values of the confinement parameter " $\pi\tau$ ," of producing for the first time near impurity-free plasmas of thermonuclear interest, and of realizing a sequence of plasma regimes of basic physical interest.

In particular, during 1979, experiments on the injection of microwaves at the lower hybrid frequency, which for the system adopted on Alcator A is 2.45 GHz, have been undertaken systematically at power levels of approximately 100 kW. One of the most striking observable effects has been the enhancement of the rate of fusion-neutron emission in deuterium plasmas, by approximately a factor of 30 when compared to the case where there is no injection of microwave power. Therefore it has

(XX. PLASMA DYNAMICS)

been possible to verify the dependence of microwave penetration and energy deposition on different macroscopic parameters, such as the magnetic field, the particle density, and the plasma current.

The Alcator C device has been brought to regular operation with well-confined plasmas and plasma currents of approximately as high as 300 kA. We recall that the reference design value of the total plasma current is 1 megampere and that one of the objectives of Alcator C is to achieve values of the confinement parameter  $n\tau$  around  $10^{14}$  sec/cm<sup>3</sup>.

A major program on microwave heating of Alcator C has been developed with the goal of realizing a system for injection of up to 4 megawatts at a frequency of 4.6 GHz. This is in the range of the lower hybrid frequency for the values of the plasma density that are expected to be realized. A parallel program of heating at the ion cyclotron frequency has also been undertaken and a series of relevant experiments has been prepared to be carried out on the Alcator A device. The objectives of these efforts are to be able to raise the maximum temperature of plasmas with peak densities of approximately  $10^{15}$  particle/cm<sup>3</sup> above 2 keV and to study their basic confinement properties in conditions where the effectiveness of ohmic heating begins to degrade. The experimental program is integrated with a theoretical effort for the numerical simulation of the plasma regimes that we hope to obtain.

The analysis of a relatively large variety of experiments (including among others the Alcator A and C, the Frascati Torus and the Princeton Large Torus where the most interesting plasma regimes have been obtained) has allowed us to formulate analytically a transport model which reproduces consistently the electron-density profile, the electron-energy confinement time, and the particle-density profiles that have been observed experimentally over a wide range of conditions.

This model that presupposes the excitation of microscopic plasma collective modes arrives at the identification of the relevant transport coefficients for the electron thermal energy and the particle density on the basis of global conditions involving particle and energy balance, criteria for the macroscopic stability of the plasma column, etc. This has strengthened the basis for the transport model and the codes that have been developed as part of our program, and that have been used both to predict the performance of Alcator C and to formulate a research program on ignition experiments by a series of compact devices. These are generally called Ignitors

or Alcators, and represent the natural evolution of the Alcator program into a generation of high-particle-density, relatively small-dimension fusion reactors. A design study of an Alcator D device along the same line has been undertaken.

Other theoretical achievements involve the identification and the analysis of new regions of stability, in the relevant parameter space, for magnetically confined toroidal plasmas with plasma pressure comparable to the effective magnetic-field pressure that are of importance for the possible realization of net power-producing fusion reactors. Another area where noticeable progress has been made is in the investigation of collective modes that can produce a change of topology (so-called magnetic reconnection) in the magnetic-confinement configuration. Modes of this type are of considerable interest also for space and astrophysics.

The Rector experiment, which was originally developed to study the confinement properties of toroidal plasmas with elongated cross sections, was employed to obtain remarkable results, in terms of improved equilibrium and stability conditions, by converting its basic axisymmetric magnetic configuration into a Stellarator-like configuration with helical symmetry. A novel distribution of coils has been adopted for this and, given its favorable construction characteristics, a series of higher performance relevant experiments is being considered.

As is traditional with our mode of operation, we have maintained a system of close collaborations with national and overseas institutions for both our theoretical and experimental programs. Our contributions have been presented at major and international meetings.

## 2. DYNAMICS OF TOROIDAL DISCHARGES

U.S. Department of Energy (Contract ET-78-S-02-4682)

James E. McCune, Daniel E. Hastings, George M. Svoboda

### a. Drift Modes in Tori

James E. McCune, George M. Svoboda

This work focuses on the analysis of drift and related low-frequency electrostatic ( $\text{low-}\beta$ ) modes, in the "collisionless" and low-collisionality (banana) regime of large toroidal systems.

## (XX. PLASMA DYNAMICS)

In our approach we make use of a drift kinetic equation with appropriate choices of the relevant parameters of the problem, and we keep finite Larmor radius and toroidal geometry effects from the outset.

In the linear treatment of the problem we abandon the traditional local approximation. Instead, we attempt an assessment of the stability properties of the system from the properties of the dispersion relation differential equation. We try to be as general as is analytically tractable in our treatment of this equation and we pay special attention to the effects of temperature gradients, the shear and the toroidal features of the magnetic field on the stability and localization properties of the modes and on the cross-flux eigenvalue problem. We also solve the dispersion relation analytically using a method of asymptotic matching. The solution and the eigenvalues so obtained, although approximate in this treatment, bear the qualitative features expected from the analysis of the dispersion relation differential equation.

In addition, we consider nonlinear turbulent electron behavior. We will examine the effects that nonlinear stochastic cross-flux electron diffusion, close to the mode rational surfaces, may have on the properties and ultimate nonlinear development of the modes.

### b. Drift Modes in Tandem Mirror Systems

Daniel E. Hastings, James E. McCune

The linear theory of low-frequency drift wave is well understood in a low- $\beta$  (where  $\beta = 8\pi p/B^2$ ) plasma. However, in new experiments like the TMX, the plasma  $\beta$  is expected to be  $O(1)$ . This represents a significant change to the physics of drift waves. In the Ph.D. thesis of Hastings we present an analysis of the physics of two prototypical drift waves when  $\beta = O(1)$ . First, we derive the low-frequency dispersion relation with all high- $\beta$  effects included. These fall into three categories: effects due to perpendicular magnetic fluctuations, effects due to parallel magnetic fluctuations, and effects due to  $\nabla B$  drifting particles. We reduce the dispersion relation to a form suitable for numerical analysis by finding a basis set of functions in which the dispersion relation can be easily expressed.

The dispersion relation is specialized to the well-known universal drift

(XX. PLASMA DYNAMICS)

instability. We examine the effect of each piece of high- $\beta$  physics on the universal drift wave and then bring them all together. In particular, for the  $\nabla B$  effects we find an analytical bound on the validity of the nonresonant approximation, and we show that it breaks down for small values of  $\beta$ , a result that had only previously been shown numerically. We show that universal's high- $\beta$  behavior differs considerably from the electrostatic understanding. For most plasma and wave parameters, we find that the universal mode is stabilized by enhanced ion Landau damping, the enhancement arising from the reduction of the parallel phase velocity due to  $\nabla B$  effects. For small  $\beta$ , we find that the behavior of the wave for the most part is dominated by the coupling to the Alfvén wave. For large  $\beta$ , the behavior of the wave is dominated by the compression of the plasma flow induced by the  $\nabla B$  particle drift. We find that, in contrast to the electrostatic case, the most unstable waves occur for phase velocities close to the ion thermal velocity, for long perpendicular wavelengths and for positive electron-temperature gradients. Also, we find that the high- $\beta$  behavior of the wave is largely independent of the electron-to-ion temperature ratio. Finally, we compute some marginal stability curves and show that for electron-temperature gradients which are less than or equal to zero the universal drift wave is stabilized at a  $\beta_i$  of 0.07. For positive electron-temperature gradients, we show that a  $\beta_i$  of at least 0.44 is needed. The difference between the two regimes we ascribe to enhanced inverse transit-time damping for positive electron-temperature gradients.

We also examine the high- $\beta$  behavior of the drift Alfvén mode, and we show that when temperature gradients can be ignored the behavior of the mode for all  $\beta$  retains its compressionless character. We find that the mode always approaches marginal stability as  $\beta$  increases. However, temperature gradients change the mode behavior considerably. Electron-temperature gradients are found to be destabilizing at high  $\beta$  through their influence on the resonant energy transfer. Ion-temperature gradients cause a marked upshift in the oscillation frequency of the mode, and hence are strongly stabilizing.

We conclude that at high  $\beta$ , the Alfvén mode will be stable and the universal mode may have a window of instability at long parallel and perpendicular wavelengths and positive electron-temperature gradients.

(XX. PLASMA DYNAMICS)

3. RF HEATING AND NONLINEAR WAVES IN TOROIDAL PLASMAS

U.S. Department of Energy (Contract ET-78-S-02-4682)

Abraham Bers, Robert H. Berman, Vladimir Fuchs, Kwok C. Ko,  
Vladimir B. Krapchev, Leo P. Harten, Abhay K. Ram, Kim S.  
Theilhaber, Maria Elena Villalon

The general objective is to explore the use of external applied rf power for the supplementary heating and confining of toroidal plasmas. Particular studies are being carried out to determine the heating and steady-state current drive with microwave power in the lower hybrid range of frequencies. The results are applied to current experiments on Alcator C and Versator II, as well as to experiments in the near future on Alcator C.

a. Current Generation by Large-Amplitude Waves

RF power has the potential to continuously generate the confining current in a tokamak plasma. The exploration of these ideas was initiated within this group a few years ago. Since then we have actively participated in workshop studies.<sup>1-3</sup> Our theoretical efforts in this area have turned to understanding the full nonlinear dynamics of the plasma in large-amplitude fields. For a strongly magnetized plasma the one-dimensional Vlasov distribution function has been found to all orders in the field amplitude.<sup>4-7</sup> The lower hybrid-driven steady-state current has been calculated and the results have been applied to current experiments on Versator II.<sup>8</sup>

b. Studies in RF Heating to Ignition

It is well known that the plasma equilibrium near ignition is thermally unstable. We have initiated a study to explore the advantages of using rf supplementary heating in reaching ignition. Specifically, the applied rf can be varied in time, and the potential for controlling the radial deposition of the power in the plasma also exists. We chose to study the plasma parameters of the High-Field Compact Tokamak Reactor (HFCTR).<sup>9</sup> We have studied the global<sup>10</sup> and radial<sup>11</sup> equilibria. The low-temperature (7-20 keV) equilibrium is unstable, but can be stabilized by a programmed rf heating source, which is gradually turned off near equilibrium.



## c. Nonlinear Effects in Coupling of RF Power to a Plasma

For LH heating the nonlinear effects are prominent in the low-density and temperature region of the plasma edge. These effects have been seen experimentally over the past two years. We have proposed a nonlinear equation, which describes the nonlinear coupling of LH waves.<sup>12</sup> The Vlasov theory of spatially modulated waves<sup>4-7</sup> confirms this result. During the past year the analytical model was refined so that the nonlinear coupling problem could be solved in some detail. For a two-waveguide array, an approximate analytical solution was found. It exhibits the reduced dependence upon waveguide phasing and shows an upshift in the  $n_{||}$ -spectrum, both consistent with experimental observations.<sup>13</sup> We have initiated two numerical schemes for solving the nonlinear equation; one attempts to find a steady-state solution for the fields, the other studies the time evolution of the coupling.

## d. Linear Propagation, Mode Conversion, and Damping in Inhomogeneous Toroidal Plasmas

A full electrostatic, local dispersion relation<sup>14</sup> is used to numerically study the propagation characteristics of waves near the LH frequency in an inhomogeneous plasma ( $\nabla n, \nabla B, \nabla T$ ). For relevant tokamak parameters and profiles, the results show significant differences from those previously obtained.<sup>15</sup> The linear mode-conversion process from LH to warm plasma wave is downshifted to lower  $n_{||}$ , and is confined spatially to regions in between the ion-cyclotron harmonics.

## e. Parametric Excitation in Lower-Hybrid Heating of Tokamak Plasmas

We have carried out a detailed linear and nonlinear analysis of quasimode type of parametric excitations relevant to the recent Alcator A heating experiment.<sup>16</sup> This quasimode excitation has been studied independently for the regions near the edge and the center of the plasma. The analysis near the edge shows that higher  $n_z$ 's than predicted by linear theory are strongly excited, which may prevent the penetration of the rf power to the plasma center. Inside the plasma the power density is much lower than at the edge and is no longer confined to well-defined resonance cones; it is spread out across the plasma column.

Currently, we are in the process of evaluating the importance of resonant parametric excitations and contrasting them with the quasimode excitations.<sup>17</sup>

(XX. PLASMA DYNAMICS)

References

1. A. Bers, "Basis for Current Drive by RF," Steady-State Current Drive in Tokamaks - Workshop Summary, Report DOE/ET-0077, February 1979, pp. 18-23.
2. A. Bers, "Steady-State Current Drive in Tokamaks by RF," presented at the Tokamak Optimization Workshop, DOE, Frederick, MD, June 1979.
3. V. Krapchev, "On the Nonlinear Theory of Large Amplitude, Coherent and Modulated HF Waves in Plasmas," presented at the Workshop on Steady-State RF-Driven Tokamak Reactors, ANL, Argonne, IL, August 1979.
4. V.B. Krapchev, "Kinetic Theory of the Ponderomotive Effects in a Plasma," *Phys. Rev. Lett.* 42, 497 (1979).
5. V.B. Krapchev, "Quasilinear Theory of Parametric Processes in Unmagnetized Plasma," *Phys. Fluids* 22, 1657 (1979).
6. V.B. Krapchev and A.K. Ram, "A Nonlinear Mode below the Electron Plasma Frequency," Proc. of 1979 Sherwood Meeting (2B13).
7. V.B. Krapchev and A.K. Ram, "Adiabatic Theory for a Single Nonlinear Wave in a Vlasov Plasma," MIT RLE PRR 79/14, July 1979; *Bull. Am. Phys. Soc.* 24, 951 (1979); submitted to *Phys. Rev. A*.
8. A.K. Ram and V.B. Krapchev, "Adiabatic Theory of Current Generation by Nonlinear Waves in a Vlasov Plasma," MIT Report PFC/JA-80-5; *Bull. Am. Phys. Soc.* 24, 961 (1979).
9. D.R. Cohn et al., "HFCTR Conceptual Design," MIT Plasma Fusion Center Report 79-2, 1979.
10. L. Harten, V. Fuchs, and A. Bers, "RF Power Requirements for Ignition," 21st Annual Meeting, Division of Plasma Physics of the APS, Nov. 12-16, 1979, Boston.
11. V. Fuchs, L. Harten, and A. Bers, "A Note on Tokamak Ignition Equilibria and Thermal Stability," MIT Plasma Fusion Center Report PFS/JA-79-14; *Nucl. Fusion* 20, 630 (1980).
12. V. Krapchev and A. Bers, MIT RLE PRR 78/7, February 1978.
13. K. Theilhaber, K. Ko, V. Krapchev, and A. Bers, "Nonlinear Coupling of LH Waves to a Tokamak Plasma," *Bull. Am. Phys. Soc.* 24, 1019 (1979).
14. M. Brambilla, *Plasma Phys.* 18, 669 (1976).
15. T. Tang, K.Y. Fu, and M.W. Farshori, *Plasma Phys.* 21, 127 (1979).
16. E. Villalon and A. Bers, "A Study of Quasimode Parametric Excitations in Lower Hybrid Heating of Tokamak Plasmas," Plasma Fusion Center Report 79-13, July 1979, submitted to *Nucl. Fusion*.
17. E. Villalon, MIT Report PFC/JA-80-2, 1980, submitted to *Phys. Fluids*.

4. NONLINEAR THEORY OF TRAPPED-PARTICLE INSTABILITIES

U.S. Department of Energy (Contract DE-AS02-78ET53074)

Thomas H. Dupree, David J. Tetreault

The phenomenon of clumps is being studied in a plasma with a magnetic field. In particular, the effect of clumps on the drift and trapped-particle mode instabilities is being studied. Clumps in the ion phase-space density produce an enhanced ion viscosity which appears to be very effective in damping these modes and providing a nonlinear stabilization.

Concepts from strong plasma turbulence are being used to investigate magnetic islands in tokamaks. Turbulent magnetic fluctuations induced by drift waves as well as those formed through self-consistent currents are being studied. The purpose is to determine how the resulting turbulent destruction of magnetic surfaces affects tokamak plasma confinement.

Work is also beginning on computer simulations of the structure of clumps in plasma.

5. AN ADVANCED SCIENTIFIC COMPUTING ENVIRONMENT

National Science Foundation (Grant ENG79-07047)

Robert H. Berman, Thomas H. Dupree, John L. Kulp, Jr.

Several problems in plasma dynamics concerning microturbulence and nonlinear phase-space structures<sup>1,2</sup> can be studied experimentally only by computer simulation techniques. These studies are essential to complement the theoretical studies that have been described in previous sections. These simulations for clumps, for example, require a fully kinetic, self-consistent description of the particles with high resolution in phase space that can represent discrete particle effects. Very effective algorithms have been developed to study these problems that will promote very efficient and cost-effective computer simulations.<sup>3,4</sup> The macrocell algorithm as originally envisioned will promote very accurate determination of short-range interparticle forces and, therefore, permit longer, more precise situations before numerical

## (XX. PLASMA DYNAMICS)

errors grow beyond reasonable bounds.

Our efforts to create an advanced scientific computing environment consisting of a LISP machine and array processor that supports interactive symbolic and numerical calculations are well under way.<sup>5,6</sup> The core of this project is the high-performance personal computer consisting of a LISP machine coupled with an arithmetic processor capable of a raw computing rate of  $\approx 10$  million floating-point (numerical) operations per second.

### References

1. R.H. Berman, "Criteria for Transition to Stochasticity," Bull. Am. Phys. Soc. 24, 942 (1979).
2. D.J. Tetreault, R.H. Berman, and T.H. Dupree, "Computer Simulation of Nonlinear Phase Space Structure," Bull. Am. Phys. Soc. 24, 395 (1979).
3. R.H. Berman, "Vectorizing a Particle Push for the Cray-1," Buffer 3, 12-15, (1979).
4. R.H. Berman and G.C. Carrette, "The Macrocell for Efficient Particle Pushes," paper presented at 1979 Conference on Particle Simulation and Hybrid Codes for Fusion, Napa, CA.
5. R.H. Berman and J.L. Kulp, "A New Environment for Computational Physics," paper presented at the Second MACSYMA User's Conference, Washington, D.C., June 1979.
6. J.L. Kulp and R.H. Berman, "A High-Speed Array Processor for Efficient Numerical Calculations," paper presented at 1979 Conference on Particle Simulation and Hybrid Codes for Fusion, Napa, CA.

## 6. TOKAMAK RESEARCH: RF HEATING AND CURRENT DRIVE

U.S. Department of Energy (Contract DE-AS02-78ET53050)

George Bekefi, Miklos Porkolab, Kuo-in Chen, Stanley C. Luckhardt

### Introduction

The use of rf power near the lower hybrid frequency has long been considered as a means of heating ions in tokamak discharges.<sup>1,2</sup> More recently, experiments have shown that electron heating can also be obtained from lower hybrid wave injection.<sup>3</sup> In view of the apparent capability to modify the electron velocity distribution function by injection of a properly tailored wavelength spectrum of lower hybrid

waves, it has been recently proposed that lower hybrid power injected with a net toroidal angular momentum should be capable of producing, via Landau damping, a steady-state toroidal current in tokamaks.<sup>4</sup> A fusion reactor driven in steady state with rf power has a number of attractive features distinguishing it from the commonly encountered transformer-driven pulsed machines. Lower hybrid experiments in progress on Versator II using phased-waveguide array, grill-type coupling structures are capable of studying all three aspects of current interest in the lower hybrid frequency range: ion heating, electron heating, and current drive.

In a second series of experiments to begin in mid 1980, microwave power will be injected into Versator II at the electron-cyclotron frequency. For this purpose, the newly developed gyrotron microwave source will be provided along with scientific and technical support from the Naval Research Laboratory. The NRL gyrotron will allow ECRH experiments to be carried out at significant power levels in the range of 100-120 kW at a frequency of 36 GHz.

To obtain a quantitative physics understanding of rf processes in tokamak plasmas, the target plasma must be capable of a well-controlled and flexible equilibrium state, and energy confinement and transport processes must be carefully monitored with a full array of tokamak plasma diagnostics. For this reason, a major effort is under way at Versator to implement a full range of plasma diagnostic experiments; and the plasma equilibrium and operation is being carefully studied and documented to provide a reliable benchmark for ongoing rf experiments.

#### Equilibrium Studies and Diagnostics

Equilibrium of the Versator II plasma is characterized<sup>5</sup> by plasma currents in the range of 30-50 kA, central density of  $2 \times 10^{13} \text{ cm}^{-3}$ , toroidal field of 10-15 kgauss, major radius 40 cm, minor radius 13 cm, and flat-top current pulse durations in normal operation in the range of 20-40 msec. Constant horizontal and vertical plasma positions needed for the rf experiments have been obtained with deviations not exceeding 0.5 cm. Low plasma impurity levels are indicated by the rapid density decay after initiation of the discharge.

Plasma density has been increased to  $4.5 \times 10^{13} \text{ cm}^{-3}$  and sustained for a few milliseconds by gas puffing with consistent measurements with both 4-mm and 2-mm

## (XX. PLASMA DYNAMICS)

microwave interferometers. Extensive measurements of the density in the region between the edge of the plasma and the lower hybrid antenna structure have been made with Langmuir probes. The density is found to follow an exponential dependence in the edge region, and the density gradients in the region of the grill are found to be in the range of  $10^{10}$  to  $10^{11}$   $\text{cm}^{-4}$  depending on the grill location.

Electron temperature during rf heating experiments is being monitored by a ruby laser Thomson-scattering system and supplemented by spectroscopic measurements in the ultraviolet, of impurity-line spatial profiles. Thomson-scattering temperature measurements indicate central electron temperatures in the range of 400-600 eV which is consistent with the observed relative intensities of the impurity lines O VII 1623 Å, N VI 1897 Å, C V 2271 Å, O V 2781 Å, and NV 1239 Å. In addition, two heterodyne detectors for observing fundamental and 2nd-harmonic cyclotron radiation are available for time-resolved, semiquantitative electron-temperature measurements.

The high-energy ion tail generated during lower hybrid heating is expected to be well confined in Versator in view of the small field ripple,  $\Delta B_T/B_T \approx 2 \times 10^{-3}$  on axis; thus not only tail generation but bulk ion heating as well may be observed. The presence of the ion tail will be monitored by a neutral charge-exchange system, and bulk ion temperature by impurity atom spectral-line Doppler widths using an ultraviolet spectrometer.

Microwave scattering experiments have been carried out in the Versator II plasma with approximately 5 watts of power at 140 GHz.<sup>6</sup> Reliable measurements were obtained after installation of refractory microwave-absorbing material in the tokamak vacuum vessel in the region around the microwave horns. Measurements in this configuration show a spectrum of density fluctuations which is monotonically decreasing with  $\omega$  for all values of  $k_{\perp}$ , with fluctuation activity in the drift-wave frequency range up to 300 kHz. This detector will be used to scatter from density perturbations associated with propagation of the high-power lower hybrid waves in the plasma during the heating and current-drive experiments.

### RF Experiments

A lower hybrid antenna system operating at 800 MHz with peak power levels of  $P \sim 150$  kW has been constructed on Versator.<sup>7</sup> This system, shown in the schematic diagram in Fig. XX-4, has the flexibility to employ a four-waveguide grill designed

# LOWER-HYBRID RF SYSTEM

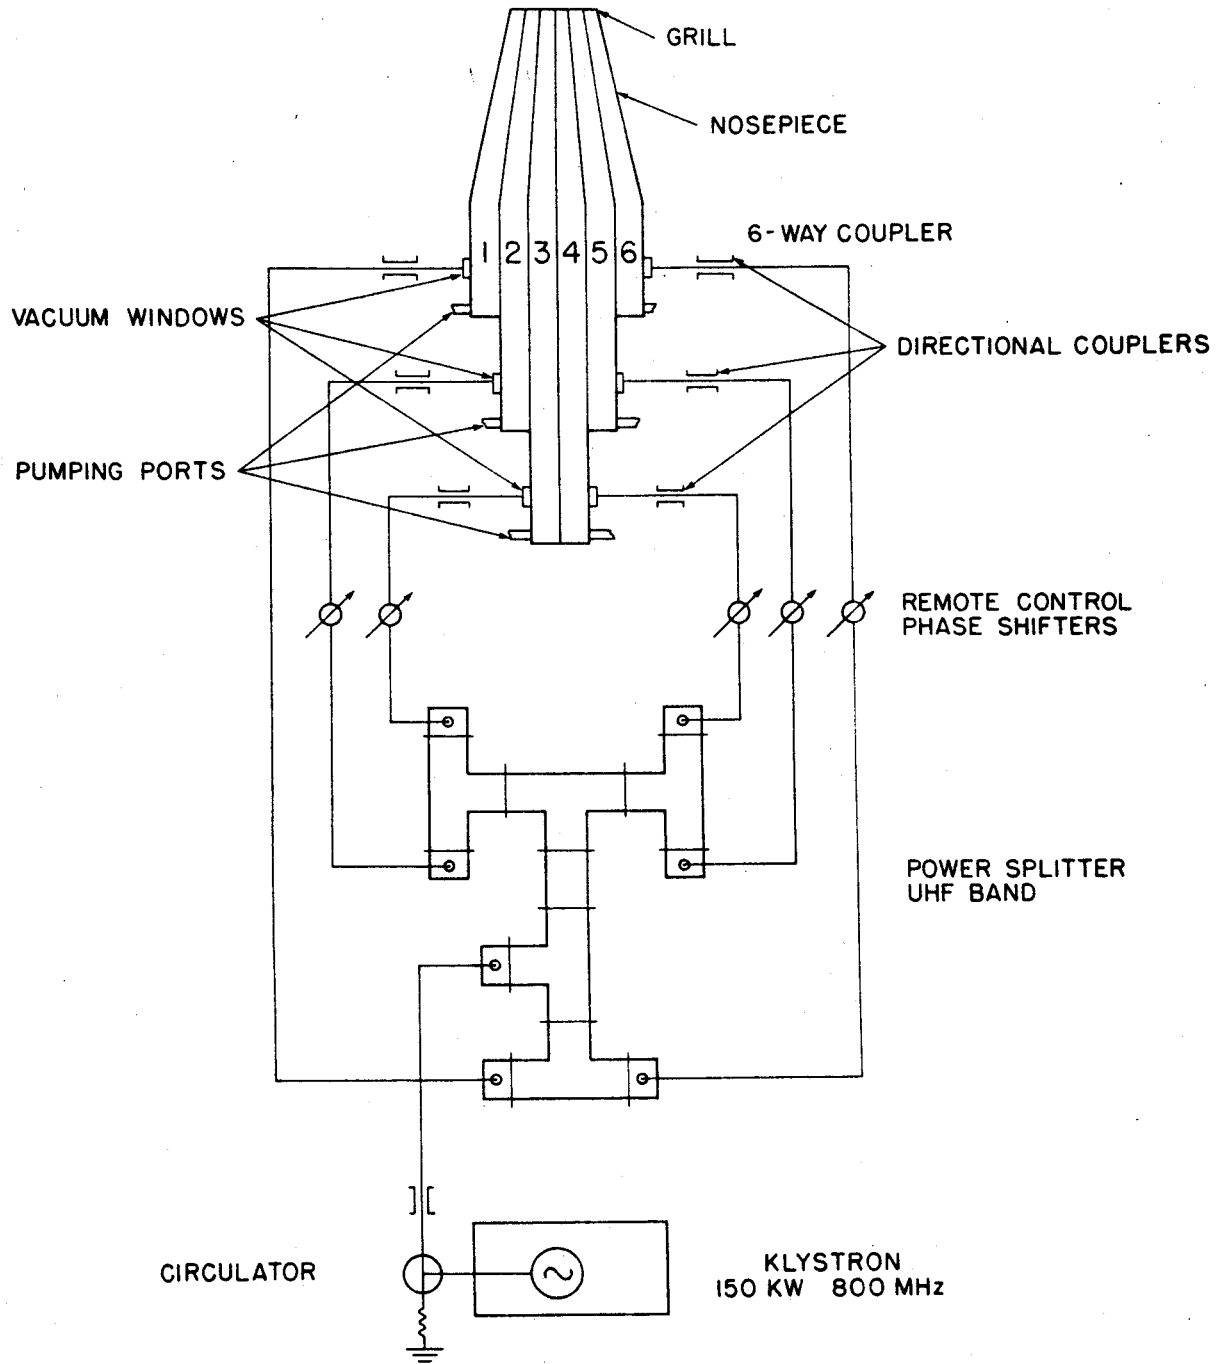


Fig. XX-4. RF system.

(XX. PLASMA DYNAMICS)

to produce a power spectrum favorable for ion heating studies, or a six-waveguide grill for electron-heating or current-generation studies. The rf system consists of a coaxial-fed, vacuum-pumped waveguide array with a tapered, interchangeable "nose-piece" section which is inserted into the tokamak vacuum vessel. The system can be used with both four- and six-waveguide grills, and the relative phases,  $\phi$ , between adjacent waveguides are continuously adjustable. These features of the MIT RF system allow a wide range of lower hybrid power spectra to be produced either for ion or electron heating, or the unidirectional power spectrum desired for current-generation experiments.

To date, measurements of RF coupling to the plasma have been carried out in some detail. At the relatively low power levels investigated,  $P = 0.5-10$  kW,  $S = 1-20$  W/cm<sup>2</sup>, the coupling efficiency is found to be strongly dependent on the relative phase of the waveguides and the position of the grill relative to the plasma limiter. In the four-waveguide experiment, minimum total-power reflectivities obtained are  $R = 17\%$  with guide phasing in the range of  $\phi = 90^\circ-180^\circ$ . As shown in Fig. XX-5, optimal coupling was obtained by positioning the grill 3.1 cm behind

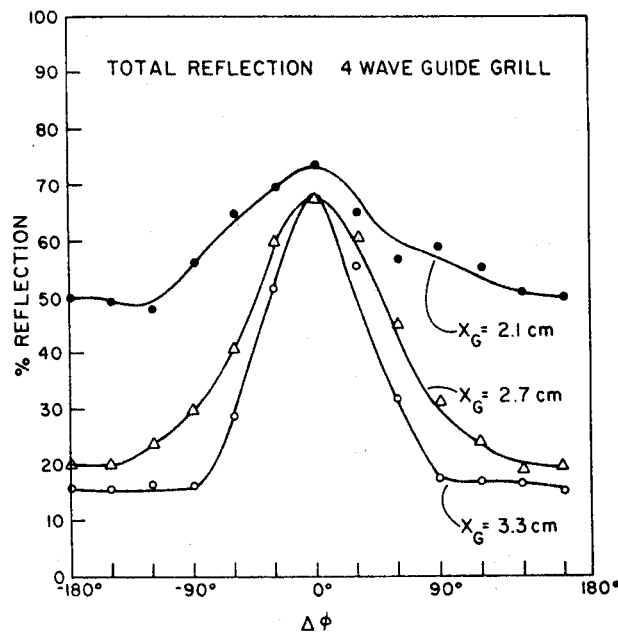


Fig. XX-5. Experimentally observed coupling (4-waveguide grill).



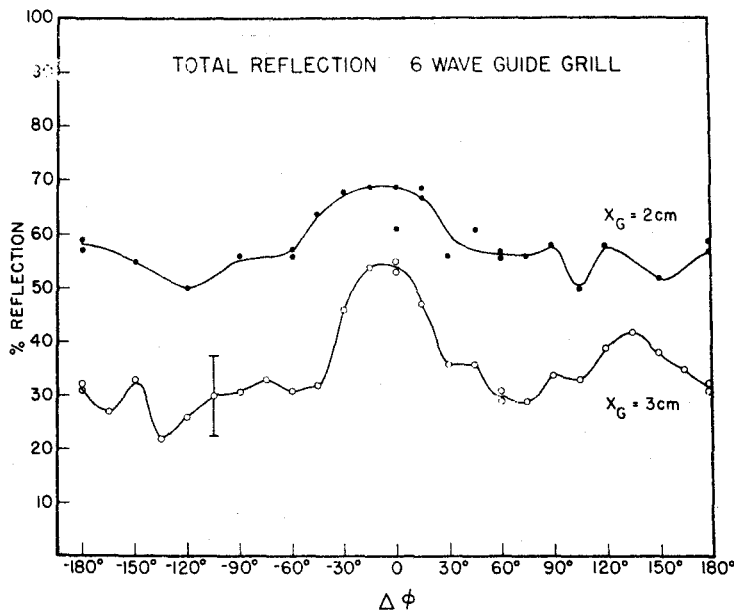


Fig. XX-6. Experimentally observed coupling (6-waveguide grill).

the limiter. In six-waveguide experiments, optimized total reflections of  $R = 25\text{-}35\%$  are obtained with the grill located 3 cm behind the limiter, as shown in Fig. XX-6.

For comparison with the waveguide-coupling theory, the density profile in the region between the limiter and the grill mouth has been measured with Langmuir probes, yielding the parameter  $\nabla n$  needed in the Brambilla waveguide-coupling theory.<sup>2</sup> The observed density gradients at the waveguide mouth are typically in the range of  $10^{10}$  to  $10^{11}$   $\text{cm}^{-4}$  depending on the grill location. For such density gradients, waveguide-coupling theory predicts total reflectivities of  $R = 75\text{-}80\%$  for the six-waveguide grill; thus the observed coupling is much better than the theoretical expectation. If density gradients 10-100 times larger than those measured are assumed, the theory yields semiquantitative agreement with the observations. This result, that agreement is obtained by assuming a large value of  $\nabla n$ , has been found in other experiments;<sup>8,9</sup> however, in those works independent measurement of  $\nabla n$  was not made, so our experiments are the first where such a discrepancy between the theory and experiment is documented.

In the coupling experiments, low power levels were used,  $S = 1\text{-}20\text{ W/cm}^2$ , so that

(XX. PLASMA DYNAMICS)

nonlinear effects are probably unimportant in explaining the discrepancy between theory and experiment. However, a number of improvements are suggested in the linear theory by the present experiments. A more realistic theory should contain boundary conditions, including the details of the tokamak port conducting wall shape, density gradients in the direction parallel to the magnetic field which have been observed in our experiment, the finite height of the waveguides, and the experimentally measured density profiles.

At high rf power levels,  $P = 100$  kW, current-drive experiments with the six-waveguide grill are predicted by recent transport code calculations<sup>10</sup> to produce an additional toroidal current in Versator of  $\Delta I = 20$  kA (initial conditions  $T_{eo} = 300$  eV,  $n_0 = 2 \times 10^{13}$  cm<sup>-3</sup>, and  $I_p = 40$  kA). Production of an rf-driven toroidal current in an ohmically heated toroidal discharge is also expected to produce a strong runaway electron component; so, in addition to electron temperature-measurements, a hard x-ray monitor is employed to detect the rf-produced high-energy runaway activity.

The high-energy ion tail generated during lower hybrid ion-heating experiments (4-waveguide grill) is expected to be well confined in Versator, in view of the small toroidal field ripple,  $\Delta B_T/B_T = 2 \times 10^{-3}$  on axis; thus, bulk ion heating is also expected.

Experimentation in 1980 will concentrate on raising the rf power levels coupled into the plasma so that significant heating and current generation can be observed.

Klystron and power supplies on loan from Princeton Plasma Physics Laboratory.

References

1. T.H. Stix, Phys. Rev. Lett. 15, 878 (1965).
2. M. Brambilla, Nucl. Fusion 16, 47 (1976).
3. J.L. Luxon et al., IEEE International Conference on Plasma Science, Montreal, 1979.
4. N.J. Fisch, Phys. Rev. Lett. 41, 873 (1978).
5. K. Chen et al., Bull. Am. Phys. Soc. 24, 1108 (1979).
6. B. Richards, Bull. Am. Phys. Soc. 24, 974 (1979).
7. S.C. Luckhardt et al., Bull. Am. Phys. Soc. 24, 1024 (1979); S. Knowlton et al., Bull. Am. Phys. Soc. 24, 1029 (1979).

8. T. Nagashima and N. Fujisawa, to be published.
9. S. Bernabei et al., Proc. Third Symposium on Plasma Heating in Toroidal Devices, International School of Plasma Physics (Varena, 1976).
10. R. Englade et al., Bull. Am. Phys. Soc. 24, 1029 (1970), to be published.

7. MIRROR-CONFINED PLASMAS

U.S. Department of Energy (Contracts DE-AS02-78ET51002  
and DE-AS02-78ET53076)

Louis D. Smullin, Robert E. Klinkowstein

We are studying problems related to the physics of plasma confined in min-B magnetic mirrors. The system Constance II has a mirror field of 2:1 ratio, with a maximum value of  $B_{\max} \approx 10$  kG. A quadrupole coil mounted in the vacuum system, and excited by a capacitor bank, can produce a full min-B field configuration when the midplane field is 3 kG.

The facility was completed by December 1979, and we have been making detailed measurements of the plasma characteristics. Diagnostics now in place include: 4-mm interferometer, neutral-particle energy analyzer, vacuum-ultraviolet monochromator, probes, diamagnetic coils, and various probes. A Thomson-scattering laser system is under construction.

In the smaller facility, Constance I, we are studying the behavior of the "washer plasma gun." We have built a fast-acting (msec) gas valve for the 2-inch washer gun, and we are comparing the behavior of two guns: one using an  $H_2$ -saturated Ti washer, and the other with controlled, pulsed gas injection.

The behavior of the magnetron injection gun, used for beam-plasma interaction, is being studied with the help of a computer-simulation code. A program, originally developed at SLAC, for plotting electron trajectories in guns with very weak space charge, has been modified to handle full space charge of guns with perveance as high as  $15 \times 10^{-6}$  volts/amp<sup>3/2</sup>.